



60W STNADARD SWITCHING POWER SUPPLY SINGLE OUTPUT

(Dimension)

L:130 mm

W:50 mm

H:31mm

Weight: 0.19Kg



■Applications

.Industrial automation machinery
.Mechanical,electrical equipment
.LED slim lighting equipment
.IT communication equipment
.Aging equipment

■Features


·Over-load,Over-temp. protection
·cooling by free air convection
·LED power indicator
·100% full load burn-in test
·No-load consumption <0.7W
·Withstand 300VAC surge input for 5 seconds
·Working temperature up to 60℃
·5G vibration tested
·High efficiency,long life,high reliability
·2 years warranty

Specifications

Product No.		SLC-60-12	SLC-60-24
Output	DC voltage	12V	24V
	Rated Current	5A	2.5A
	Current Range	0-5A	0-2.5A
	Rated Power	60W	60W
	Ripple and Noise(Max)Note.2	150mVp-p	240mVp-p
	Voltage adjustment	10.8-13.2V	22-27.6V
	Voltage tolerance Note3	±1%	±1%
	Linear Regulation Note4	±0.5%	±0.5%
	Load Regulation Note5	±0.5%	±0.5%
	Setup and rise time	1000ms,30ms/230VAC 1000ms,30ms/110V	
Input	Hold up time (Typ)	50ms/230VAC 10ms/115AC	
	Voltage range	100-240VAC	
	Frequency range	47-63HZ	
	Efficiency (Typ)	83%	86%
	AC current (Typ)	1.22/110V 0.56A/220V	
	Surge (Inrush) current (Typ)	Cold start: 65A/230VAC	
Protection	Leakage Current	<2mA/240VAC	
	Overload	>105% rated output power	
		Protection type: Hiccup mode, recovers automatically after fault condition is removed	
	Over temperature	Overheat protection starts when temperature in transistor over 140℃	
Environment		Recovers automatically after temperature is normal.	
	Working temp.	-20~+60℃ (Please refer to the attenuation curve)	
	Working humidity	20~90% RH,Non-condensing	
	Storage temp & hmdty	-40~+80℃	
	Temp. coefficient	±0.03%/℃ (0~50℃)	
Safety reg. & EMC (Note.6)	Vibration proof	10~500HZ,5G 10min/1 cycle, period for 60min. each along X、Y、Z axes	
	Safety regulation	GB195110.1-2004/IEC61347-1:2003 CE(EMC+LVD)	
	Voltage proof	I/P-O:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC	
	Isolation resistance	I/P-O/P, I/P-FG,O/P-FG:100M Ohms/500VDC/25℃/70% RH	
	EMC irradiation	EN 55032:2015+A11:2020;EN55035:2017+A11:2020	
Others	EMC disturbance proof	EN IEC 61000-3-2:2019; EN 61000-3-3:2013+A1:2019	
	Dimensions	130*50*31mm(L*W*H)	
Remark	Packing	0.19kg/PCS;72PCS/17.2kg	
		1. Unless specially indicated, all data are taken under 230VAC input, rated load and 25℃ environment temp. 2.Ripple and noise: measured with a 12" double ripple cord connected in parallel with a 0.1μF and a 47 μF capacitor on 20MHz bandwidth. 3.Tolerance(Accuracy): including preset errors, linear adjustment rate and load adjustment rate. 4.Linear adjustment: taken under rated load from low voltage to high voltage. 5.Load adjustment: taken under 0~100% of rated load. 6. Power supply is taken as part of the whole system, and needs to be confirmed with terminal instruments for EMC.	

60W STNADARD SWITCHING POWER SUPPLY SINGLE OUTPUT


■ Appearance

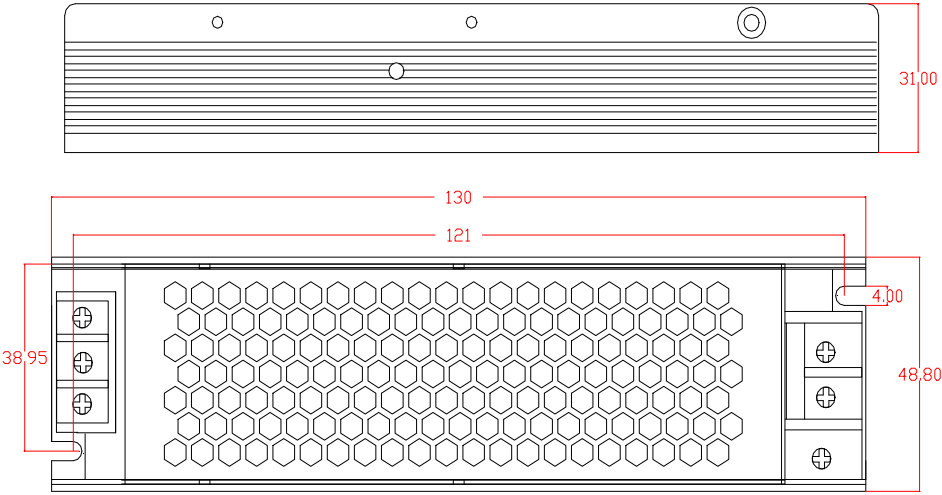


Definitionn the pin of the terminal

Pin number	Pin function
1	FG
2	AC/L
3	AC/N
4	OUTPUT +
5	OUTPUT -

■ Frame diagram

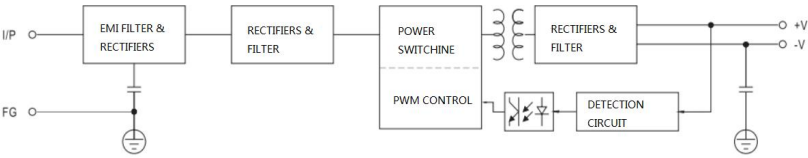

■ Derating curve

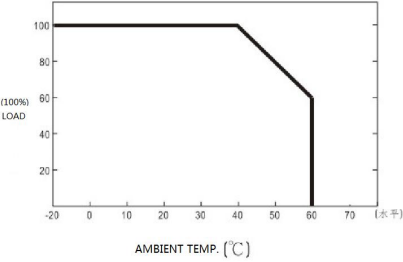

■ Static Characteristics

